

BR 150 - 2000



Hot water storage tank

BR 150 - 2000

Application

This hot water storage tank is equipped with a smooth pipe heat exchanger and can be used as an auxiliary storage tank for various heating boilers, such as oil, gas, solid fuel and similar.

Corrosion protection for parts with drinking water contact

Enamelled as per DIN 4753. A magnesium anode offers additional corrosion protection.

External corrosion protection


Up to 500 l protective enamelled layers and foam encased
800 to 2,000 l powder-coated

Heat insulation

Type 150-500: 50 mm PU rigid foam insulation with soft sleeve

Type 800-1000: 95 mm PU rigid foam half-shell with soft sleeve

Type 1500-2000: 85 mm PU rigid foam half-shell with soft sleeve

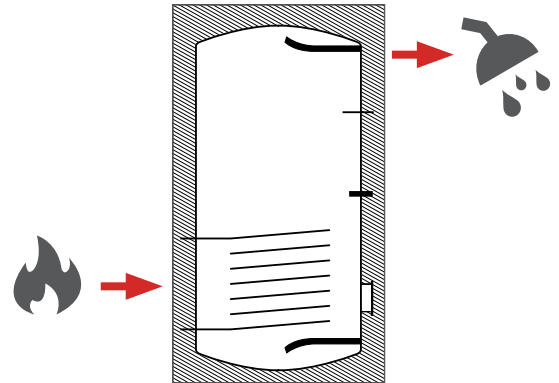

Model overview BR 150 - 2000

Type	Article no.	Volume	Height with insulation	Tilt height	Installation diameter	Weight (empty)	Surface HE bottom	Output figure	Efficiency class
Unit	[-]	[l]	[mm]	[mm]	[mm]	[kg]	[m²]	[-]	[-]
BR 150	STD0150BR	151	950	1135	610	74	1	2,2	B
BR 200	STD0200BR	201	1215	1370	610	91	1,3	4,0	C
BR 300	STD0300BR	326	1570	1710	660	123	1,5	6	C
BR 400	STD0400BR	415	1500	1690	760	147	1,8	10,4	C
BR 500	STD0500BR	496	1800	1960	760	164	2,3	14	C
BR 600	STD0600BR	559	2000	2150	760	190	2,3	16	C
BR 800	STD0800BR	805	1990	2020	790	270	3,6	22	C
BR 1000	STD1000BR	910	2190	2220	790	295	3,6	34	C
BR 1500	STD1500BR	1388	2250	2355	950	343	3,9	46	C
BR 2000	STD2000BR	1936	2390	2490	1100	360	4,1	60	C

Hot water storage tank

Technical specifications BR 150 - 2000

Type	Unit	BR 150	BR 200	BR 300	BR 400	BR 500	BR 600	BR 800	BR 1000	BR 1500	BR 2000
Article no.	[-]	STD0150BR STD0150BR.H	STD0200BR STD0200BR.H	STD0300BR STD0300BR.H	STD0400BR STD0400BR.H	STD0500BR STD0500BR.H	STD0600BR STD0600BR.H	STD0800BR	STD1000BR	STD1500BR	STD2000BR
Volume	[l]	151	201	326	415	496	559	805	910	1388	1936
Drinking water content	[l]	145	192,8	317	404	481	544	774	879	1344	1901
Content HE bottom	[l]	6	8,2	9	11	15	15	31	31	34	35
Height with insulation	[mm]	950	1215	1570	1500	1800	2000	1990	2190	2250	2390
Diameter with insulation	[mm]	610	610	660	760	760	760	990	990	1200	1350
Diameter without insulation	[mm]	-	-	-	-	-	-	790	790	950	1100
Tilt height	[mm]	1135	1370	1710	1690	1960	2150	2020	2220	2355	2490
Installation diameter	[mm]	610	610	660	760	760	760	790	790	950	1100
Weight (empty)	[kg]	74	91	123	147	164	190	270	295	343	360
Max. operating pressure heating side	[bar]	10	10	10	10	10	10	10	10	10	10
Test pressure heating side	[bar]	15	15	15	15	15	15	15	15	15	15
Max. operating pressure hot drinking water side	[bar]	10	10	10	10	10	10	10	10	6	6
Test pressure hot drinking water side	[bar]	15	15	15	15	15	15	15	15	9	9
Max. operating temperature heating side	[°C]	95	95	95	95	95	95	95	95	95	95
Max. operating temperature hot drinking water side	[°C]	95	95	95	95	95	95	95	95	95	95
Surface HE bottom	[m²]	1	1,3	1,5	1,8	2,3	2,3	3,6	3,6	3,9	4,1
Insulation thickness	[mm]	50	50	50	50	50	50	95	95	85	85
Max. installation length EHP	[mm]	450	500	500	650	650	650	800	800	950	1100
Max. output EHP	[kW]	1,5	2	2,5	4	4	6	7,5	7,5	12	15
Output figure	[-]	2,2	4,0	6	10,4	14	16	22	34	46	60
On-demand heat overhead	[kWh/d]	1,21	1,60	1,80	2,40	2,60	2,60	3,10	3,40	4,10	4,50
Holding losses	[W]	50	68	75	101	107	110	129	142	171	188
Efficiency class	[-]	B	C	C	C	C	C	C	C	C	C
Pressure loss heating side	[mbar]	60	74	90	102	167	192	180	180	234	246
Flow rate heating side	[m³/h]	1,8	2,3	2,7	3,1	3,8	4,3	6,5	6,5	7	7
Insulation material	[-]	PU rigid foam (λ=0.024 W/mK)						PU rigid foam shell (λ=0.024 W/mK)			
Corrosion protection	[-]	Enamelled as per DIN 4753, magnesium anode									

Output data BR 150 - 2000

		Continuous output at supply temperature ¹						Values as per DIN4708 (data relative to output figure) ²						Draw-off performance in 60 min ³
		50 °C		60 °C		70 °C		NL	Max. draw-off performance in 10 min		Draw-off performance after 30 min		Supply temp. 70 °C	
		[kW]	[l/h]	[kW]	[l/h]	[kW]	[l/h]		[l]	[l/min]	[l]	[l/min]	[l]	
HE bottom	150	4,2	103	12,0	295	21,0	516	2,2	204	20,4	81	18,5	690	
	200	5	123	15,0	369	26,0	639	4	290	29,0	149	27,0	900	
	300	6,3	154	18,0	442	31,5	774	6,0	325	32,5	220	27,0	1109	
	400	7,1	175	20,4	501	35,8	877	10,4	423	42,4	381	33,7	1423	
	500	8,8	216	25,2	619	45,7	1083	14,0	478	47,8	474	37,5	1678	
	600	10,1	248	28,8	708	45,7	1238	16	536	53,6	580	41,5	1881	
	800	12,2	299	34,8	855	60,9	1496	22,0	645	64,5	792	49,1	2818	
	1000	15,1	371	43,2	1061	75,6	1857	34,0	839	83,9	1214	62,6	2953	
	1500	16,4	402	46,8	1150	81,9	2012	46,0	1021	102,1	1631	75,2	3871	
2000	17,2	423	49,2	1209	86,1	2115	60,0	1150	115,0	1837	84,5	4520		

1 - Heating from CW 10 °C to WW 45 °C

2 - Heating from CW 10 °C to WW 45 °C; supply 70 °C; storage tank temperature CW + 50 K

3 - Computed data at maximum output; CW 10 °C to WW 45 °C; storage tank temperature 60 °C

Connections and dimensions BR 150 - 2000

Connections		Unit	BR 150	BR 200	BR 300	BR 400	BR 500	BR 600	BR 800	BR 1000	BR 1500	BR 2000
FO	Top sensor	[mm]	950 ½" IT	1215 ½" IT	1570 ½" IT	1500 ½" IT	1800 ½" IT	2000 ½" IT	1940 ½" IT	2140 ½" IT	2250 ½" IT	2390 ½" IT
WW	Hot water	[mm]	950 1¼" IT	1215 1¼" IT	1570 1¼" IT	1500 1¼" IT	1800 1¼" IT	2000 1¼" IT	1765 2" IT	1965 2" IT	2250 2" IT	2060 2" IT
AN	Anode	[mm]	950 1¼" IT	1215 1¼" IT	1570 1¼" IT	1500 1¼" IT	1800 1¼" IT	2000 1¼" IT	1940 1¼" IT	2140 1¼" IT	2250 1¼" IT	2390 1¼" IT
Z	Circulation	[mm]	740 ½" IT	950 ½" IT	1200 ½" IT	1150 ½" IT	1400 ½" IT	1550 ½" IT	1400 1" IT	1600 1" IT	1670 1" IT	1620 1" IT
HZV	Heating supply	[mm]	640 1" IT	780 1" IT	840 1" IT	855 1" IT	1020 1" IT	1020 1" IT	1195 1" ¼ IT	1195 1" ¼ IT	1225 1" ¼ IT	1200 1" ¼ IT
F/TH	Circulation	[mm]	740 ½" IT	1000 ½" IT	1350 ½" IT	1250 ½" IT	1550 ½" IT	1750 ½" IT	1650 ½" IT	1850 ½" IT	1825 ½" IT	1960 ½" IT
F HZ	Heating sensor	[mm]	-	-	570 ½" IT	590 ½" IT	600 ½" IT	600 ½" IT	660 ½" IT	660 ½" IT	575 ½" IT	600 ½" IT
HZR	Heating return	[mm]	240 1" IT	240 1" IT	240 1" IT	255 1" IT	255 1" IT	255 1" IT	275 1" ¼ IT	275 1" ¼ IT	325 1" ¼ IT	360 1" ¼ IT
KW	Cold water	[mm]	130 1¼" IT	130 1¼" IT	140 1¼" IT	155 1¼" IT	155 1¼" IT	155 1" IT	175 2" IT	175 2" IT	225 2" IT	260 2" IT
EHP	Electric heating cartridge	[mm]	-	840 1½" IT	910 1½" IT	920 1½" IT	1090 1½" IT	-	-	-	-	-
FLO	Flange top	[mm]	-	-	-	-	-	1080 Ø 180/120 mm	1400 Ø 180/120 mm	1400 Ø 180/120 mm	1315 Ø 180/120 mm	1280 Ø 180/120 mm
FLU	Flange bottom	[mm]	285 Ø 180/120 mm	285 Ø 180/120 mm	295 Ø 180/120 mm	310 Ø 180/120 mm	310 Ø 180/120 mm	310 Ø 180/120 mm	350 Ø 290/220 mm	350 Ø 290/220 mm	445 Ø 290/220 mm	470 Ø 290/220 mm
ANS	Anode side	[mm]	-	-	-	-	-	625 1" ¼ IT	690 1" ¼ IT	690 1" ¼ IT	830 1" ¼ IT	990 1" ¼ IT
ENT	Ventilation	[mm]	-	-	-	-	-	-	1940 1" ¼ IT	2140 1" ¼ IT	2250 1" ¼ IT	2390 1" ¼ IT

