

EcoCompact 200 - 500



Solar heating system storage tanks


EcoCompact 200 - 500

Application

Compact hot water system storage tank with solar station integrated in the insulation. The full equipment level guarantees great ease of assembly removing any mistake in terms of installation.

Solar station equipment

Solar station in complete 2 line design with monoblock housing, breather chamber, flushing/emptying valve, non-return valve, safety group, high-efficiency pump and solar controller.

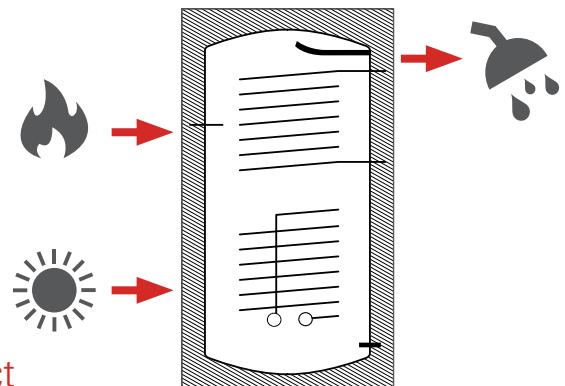

Corrosion protection for parts with drinking water contact

Enamelled as per DIN 4753. A magnesium anode offers additional corrosion protection.

External corrosion protection

Protective enamelled layers, foam encased

Heat insulation

50 mm PU rigid foam insulation with soft sleeve

Applications and benefits

- Compact modern design
- Avoiding gravity circulation
- Optimised on-demand heat overhead
- Plug & play - Solar station / Controllers / Sensors

Model overview EcoCompact 200 - 500

Type	Article no.	Volume [l]	Height with insulation [mm]	Tilt height [mm]	Installation diameter [mm]	Weight (empty) [kg]	Surface HE top / bottom [m ²]	Output figure [-]	Energy efficiency class [-]
Unit	[-]								
EC 200	STD0200ECO	224	1350	1485	610	94	0.8 / 1	1.8	C
EC 300	STD0300ECO	285	1670	1780	610	124	1 / 1.2	2.2	C
EC 400	STD0400ECO	415	1500	1685	760	147	1.1 / 1.5	3.0	C
EC 500	STD0500ECO	496	1740	1900	760	190	1.4 / 1.6	4.8	C

System storage tanks

Technical specifications EcoCompact 200 - 500

Type	Unit	EC 200	EC 300	EC 400	EC 500
Article no.	[·]	STD0200ECO	STD0300ECO	STD0400ECO	STD0500ECO
Volume	[l]	224	285	415	496
Drinking water content	[l]	212.6	272.1	398.9	477.1
Content HE top	[l]	5	5.7	6.6	8.5
Content HE bottom	[l]	6.4	7.2	9.5	10.4
Height with insulation	[mm]	1350	1670	1500	1740
Diameter with insulation	[mm]	610	610	760	760
Tilt height	[mm]	1485	1780	1685	1900
Installation diameter	[mm]	610	610	760	760
Weight (empty)	[kg]	94	124	147	190
Max. operating pressure heating side	[bar]	10	10	10	10
Test pressure heating side	[bar]	15	15	15	15
Max. operating pressure hot drinking water side	[bar]	10	10	10	10
Test pressure hot drinking water side	[bar]	15	15	15	15
Max. operating pressure solar side	[bar]	10	10	10	10
Test pressure solar side	[bar]	15	15	15	15
Max. operating temperature solar side	[°C]	95	95	95	95
Surface HE top	[m²]	0.8	1	1.1	1.4
Surface HE bottom	[m²]	1	1.2	1.5	1.6
Insulation thickness	[mm]	50	50	50	50
Max. installation length EHP	[mm]	500	500	650	650
Max. output EHP	[kW]	2	2.5	4	4
Output figure	[·]	1.8	2.2	3.0	4.8
On-demand heat overhead	[kWh/d]	1.60	1.90	2.40	2.60
Holding losses	[W]	68	80	101	107
Energy efficiency class	[·]	C	C	C	C
Insulation material	[·]	PU rigid foam ($\lambda=0.024 \text{ W/mK}$)			
Corrosion protection	[·]	Enamelled as per DIN 4753, magnesium anode			

Output data EcoCompact 200 - 500

HE	Continuous output at supply temperature ¹						Values as per DIN4708 (data relative to output figure) ²				Draw-off performance in 60 min ³		
	50 °C			60 °C		70 °C		NL	Max. draw-off performance in 10 min		Draw-off performance after 30 min		Supply temp. 70 °C
	[kW]	[l/h]	[kW]	[l/h]	[kW]	[l/h]	[l]		[l]	[l/min]	[l]	[l/min]	
200	3.4	83	9.6	236	16.8	413	1.8		186	18.6	66	17.3	528
300	4.2	103	12.0	295	21.0	516	2.2		204	20.4	81	18.5	667
400	4.6	113	13.2	324	23.1	567	3.0		232	232.2	111	20.5	802
500	5.9	145	16.8	413	29.4	722	4.8		291	29.1	177	24.6	988

1 - Heating from CW 10 °C to WW 45 °C

2 - Heating from CW 10 °C to WW 45 °C; supply 70 °C; storage tank temperature CW + 50 K

3 - Computed data at maximum output; CW 10 °C to WW 45 °C; storage tank temperature 60 °C

Connections and dimensions EcoCompact 200 - 500

Connections		Unit	EC 200	EC 300	EC 400	EC 500
F/TH	Sensor/Termometer	[mm]	1122 Ø 17.2 mm	1422 Ø 17.2 mm	1250 Ø 17.2 mm	1490 Ø 17.2 mm
EHP	Electric heating cartridge	[mm]	730 1½" IT	900 1½" IT	850 1½" IT	900 1½" IT
MON	Assembly bracket	[mm]	680	680	705	705
FS	Solar sensor	[mm]	452 Ø 17.2 mm	452 Ø 17.2 mm	477 Ø 17.2 mm	477 Ø 17.2 mm
SVL	Solar supply	[mm]	252 Ø 25.75 mm	252 Ø 25.75 mm	277 Ø 25.75 mm	277 Ø 25.75 mm
SRL	Solar return	[mm]	252 Ø 27 mm	252 Ø 27 mm	277 Ø 27 mm	277 Ø 27 mm
AN	Anode	[mm]	1320 1¼" IT	1640 1¼" IT	1470 1¼" IT	1710 1¼" IT
WW	Hot water	[mm]	1203 1" IT	1523 1" IT	1330 1" IT	1570 1" IT
HZV	Heating supply	[mm]	1105 1" IT	1390 1" IT	1230 1" IT	1455 1" IT
Z	Circulation	[mm]	1000 ½" IT	1250 ½" IT	1115 ½" IT	1270 ½" IT
FHN	Heating sensor post-heating	[mm]	900 ½" IT	1150 ½" IT	1015 ½" IT	1170 ½" IT
HZR	Heating return	[mm]	790 1" IT	1030 1" IT	915 1" IT	1050 1" IT
MAG	MAG bracket	[mm]	412	412	412	412
KW	Cold water	[mm]	135 1" IT	135 1" IT	145 1" IT	145 1" IT

EcoCompact 200 - 500

